



## 222A.T - Wiertła szlifowane

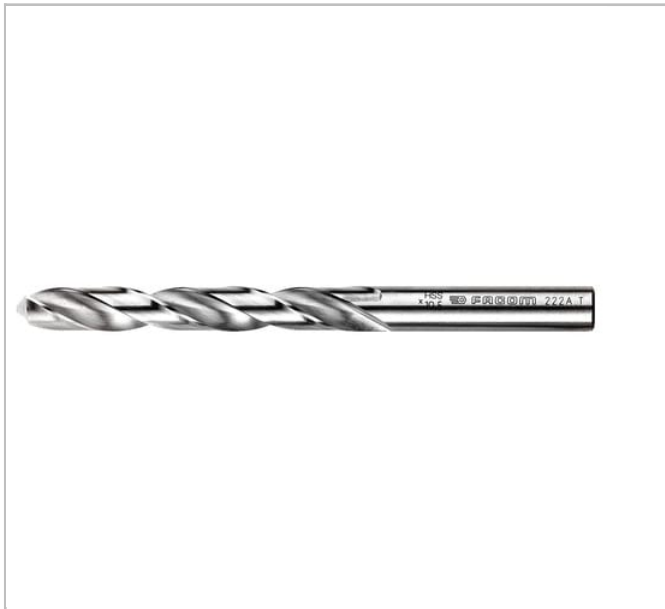

### Description:

- - Do stali do 800 MPa, stali nierdzewnej, żeliwa szarego, stopów aluminium.

	Długość [mm]	Waga [g]	Długość [mm]
<b>222A.T1</b>	35.0	5.0	
<b>222A.T1.5</b>	40.0	5.0	
<b>222A.T10</b>	132.0	60.0	132.0
<b>222A.T10.2</b>	132.0	65.0	
<b>222A.T10.5</b>	132.0	70.0	
<b>222A.T11</b>	142.0	80.0	
<b>222A.T11.5</b>	142.0	90.0	
<b>222A.T12</b>	152.0	100.0	
<b>222A.T12.5</b>	152.0	110.0	
<b>222A.T13</b>	152.0	115.0	
<b>222A.T2</b>	50.0	5.0	
<b>222A.T2.5</b>	57.0	5.0	
<b>222A.T3</b>	62.0	5.0	
<b>222A.T3.3</b>	65.0	5.0	
<b>222A.T3.5</b>	70.0	5.0	
<b>222A.T4</b>	75.0	10.0	
<b>222A.T4.2</b>	75.0	10.0	
<b>222A.T4.5</b>	80.0	10.0	
<b>222A.T5</b>	85.0	10.0	
<b>222A.T5.5</b>	92.0	15.0	
<b>222A.T6</b>	92.0	15.0	
<b>222A.T6.5</b>	102.0	20.0	
<b>222A.T6.8</b>	105.0	25.0	
<b>222A.T7</b>	107.0	25.0	
<b>222A.T7.5</b>	110.0	30.0	
<b>222A.T8</b>	117.0	35.0	
<b>222A.T8.5</b>	117.0	40.0	
<b>222A.T9</b>	127.0	50.0	
<b>222A.T9.5</b>	127.0	55.0	

