



## 50.SR - Clés polygonales à frapper métriques ADF



### Description :

- Alliage spécial Cuivre-Béryllium antidéflagrant et antimagnétique.

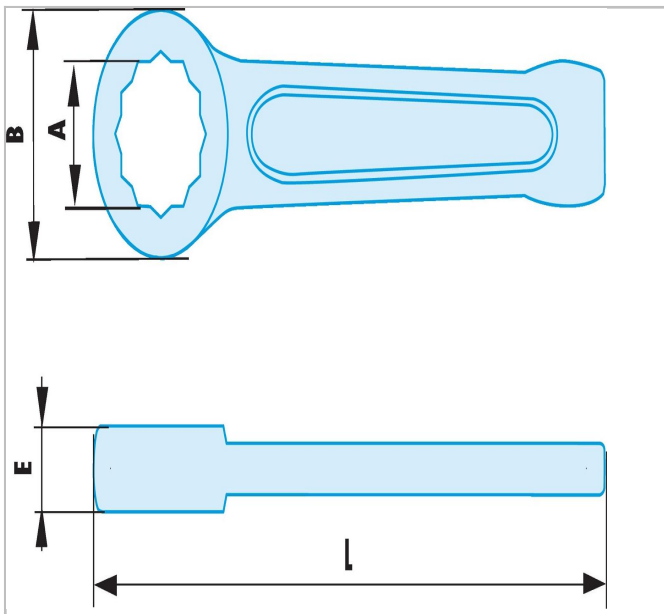

	A [mm]	longueur [mm]	Épaisseur [mm]	Tête Largeur B [mm]	Poids [g]
<b>50.100SR</b>	100.0	420.0	43.0	155.0	7000.0
<b>50.105SR</b>	105.0	420.0	43.0	155.0	7000.0
<b>50.110SR</b>	110.0	450.0	45.0	168.0	9100.0
<b>50.120SR</b>	120.0	480.0	50.0	182.0	11000.0
<b>50.17SR</b>	17.0	145.0	12.0	32.0	210.0
<b>50.19SR</b>	19.0	145.0	12.0	32.0	200.0
<b>50.22SR</b>	22.0	165.0	14.0	42.0	245.0
<b>50.24SR</b>	24.0	165.0	14.0	42.0	235.0
<b>50.27SR</b>	27.0	175.0	16.0	46.0	350.0
<b>50.30SR</b>	30.0	185.0	16.0	53.0	475.0
<b>50.32SR</b>	32.0	185.0	16.0	53.0	465.0
<b>50.34SR</b>	34.0	205.0	19.0	58.0	580.0
<b>50.36SR</b>	36.0	205.0	19.0	58.0	580.0
<b>50.41SR</b>	41.0	225.0	20.0	64.0	755.0
<b>50.46SR</b>	46.0	235.0	22.0	73.0	990.0
<b>50.50SR</b>	50.0	250.0	23.0	78.0	1100.0
<b>50.55SR</b>	55.0	265.0	23.5	86.0	1400.0
<b>50.60SR</b>	60.0	274.0	25.5	92.0	1600.0
<b>50.65SR</b>	65.0	298.0	28.0	102.0	2000.0
<b>50.70SR</b>	70.0	320.0	31.5	108.0	2400.0
<b>50.75SR</b>	75.0	326.0	33.0	113.0	3000.0
<b>50.80SR</b>	80.0	350.0	34.0	124.0	3600.0
<b>50.85SR</b>	85.0	355.0	36.0	130.0	4300.0
<b>50.90SR</b>	90.0	390.0	39.0	142.0	5500.0
<b>50.95SR</b>	95.0	390.0	39.0	142.0	5400.0