


256.6PB | AT - PROTWIST® schroevendraaier voor sleufschroeven - gefreesd bled

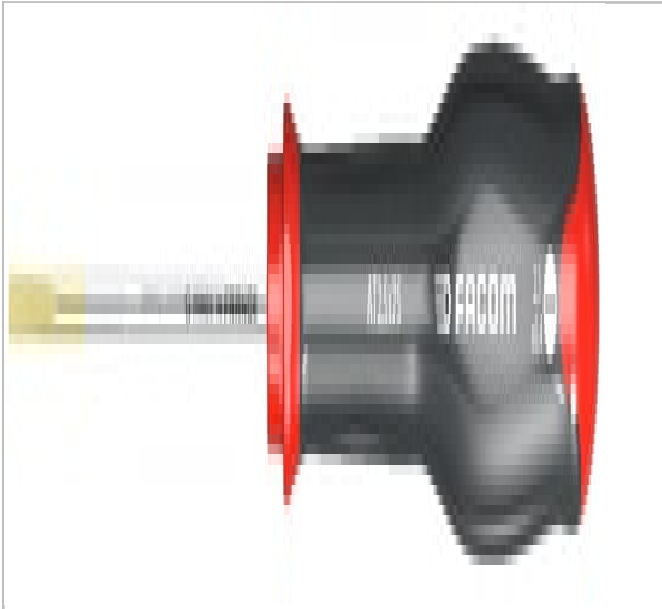

Description:

- CNC tip machining - gives better Screw Fit increasing Torque Transfer and Reducing Wear.[nl]
- Handle 'Channel' - +10% Torque.[nl]
- Laser Marking - gives virtually Permanent Marking.[nl]
- Blade " tri-coating " treatment (Zinc-Nickel-Chromium) - 4x Corrosion Resistance.[nl]
- Inline Hardening Process – +100% Tip Life and +100% Bar Strength. [nl]
- Handle Material - Softer for more Comfort and still Chemical Resistant.[nl]
- Round shank for access in holes.[nl]
- Extra-long shank up to 300 mm for difficult and remote access.[nl]